


Flex 60 RGB



Flex 60 RGB

MEASURES	3,000 x 10 x 2 mm (segment 50 mm) 118.1 x 0.39 x 0.08 in (segment 1.97 in)
VOLTAGE	12V
POWER CONS	13.79 W/m (max.)
LED	5050
LED QUANT.	60 LED/m (60 segments of 3 LED)
LED COLOR	B 465 / G 517 / R 520 nm
LUMEN	B 61lm/m / G 258 lm/m / R 138 lm/m
LUMEN EFF.	31,41 lm/W
LIGHT BEAM	120°
MILICANDELA	B 325 mcd/LED / G 1350 mcd/LED / R 725 mcd/LED
LIFE SPAN	>36,000 Hours
T_p MAX.	65°C
% FAILURES	Category F 10
LUMINOUS FLUX	Category B L70
CHROM. COOR.	B X=0,1367 Y=0,055 G X=0,1326 Y=0,7057 R X=0,6928 Y=0,3072

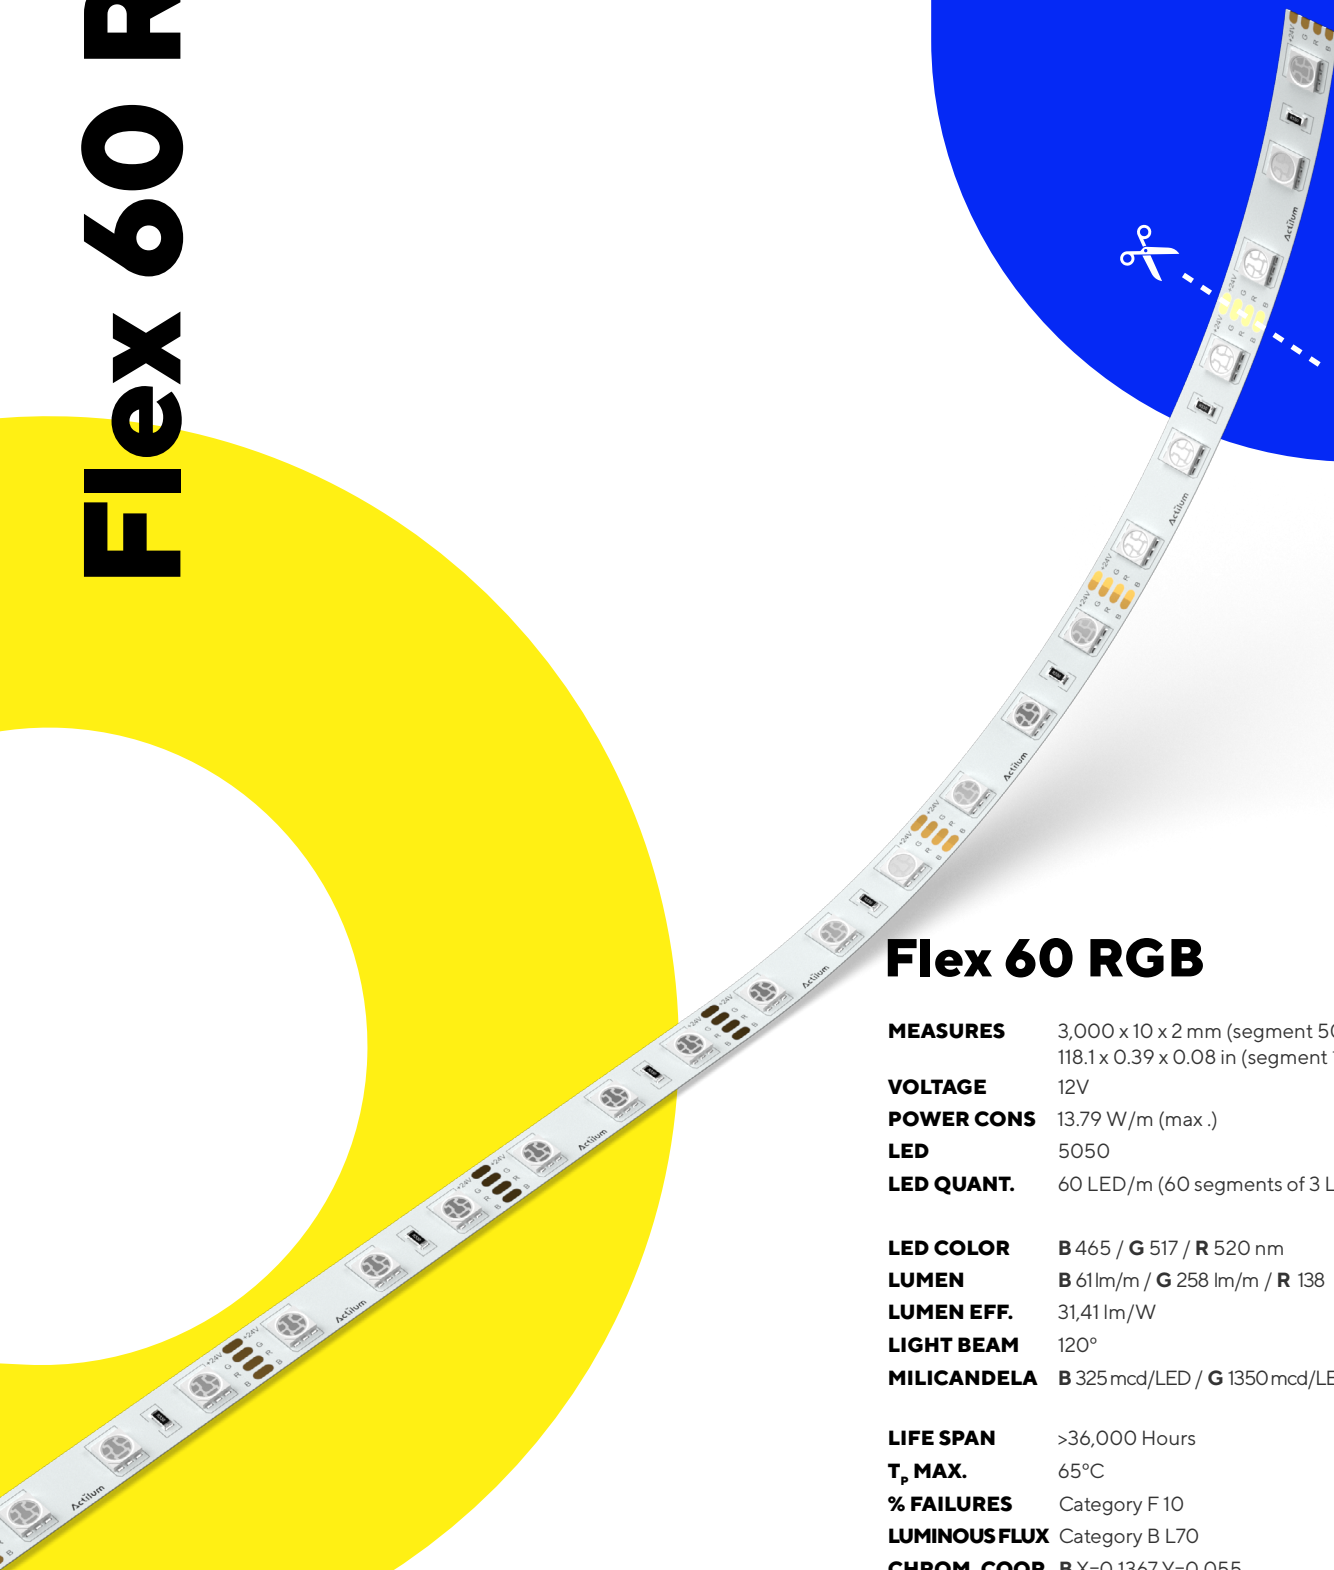

All rights reserved. The information in this document is subject to change without notice.
Manufactured in our installations in Barcelona, Spain.
C/ Josefina Vidal Folch 1-3, 08930 Barcelona (+34) 935 334 600 - www.actilum.com

Actilum Lux